




A-UNIQUE

ASIA UNIQUE LED LIGHTING CO., LTD

Slim-fit tiltable LED Downlight 2 Power + 4 CCT

AU60-DL Series

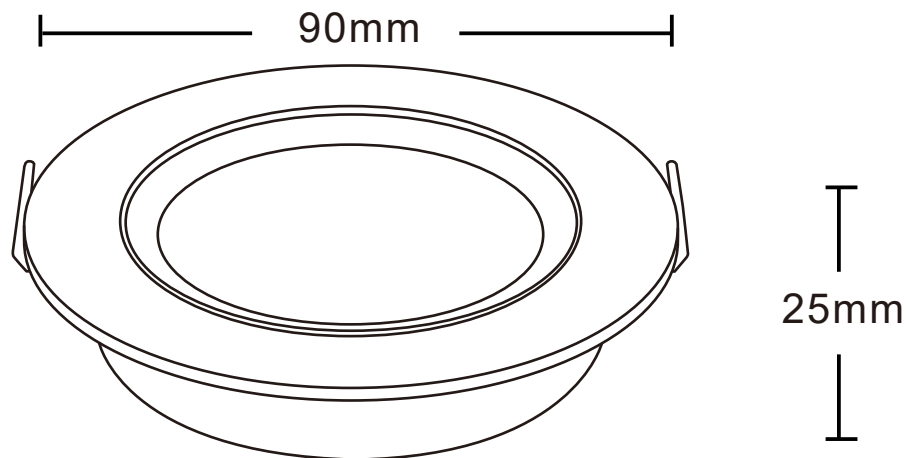

Cutout:70mm



General Features:

- Dual wattage control: 5W / 8W selectable
- 4CCT: 2700K 3000K 4000K 6000K selectable via switch
- Ultra-slim design, only 25mm in height, suitable for low ceilings and tight spaces
- Flicker Free Driver: For better visual comfort
- Triac Dimmable, Compatible to most branded dimmers,
- Hassle-free installation, with a push fit loop in and out terminal and a detachable driver that compatible with the wieland GST18i3 connector
- CE and RoHS approved, Complies with new ERP regulation
- 3 years warranty


Technical Specifications

Model No.	AU60-DL0508-4C	
Dimension(mm)	Ø90*H25	
Cutout(mm)	70	
Wattage(w)	5W/8W selectable	
Input Voltage(v)	AC200~240V	
Light Source	SMD2835	
SDCM	<6	
4 CCT(K)	2700K- 3000K-4000K-6000K Switchable	
Luminous Flux (lm)±5%	5W (475-550lm) 8W (640-760lm)	
CRI	>80Ra	
Beam Angle(°)	10°/20°/30°	
Driver option	Triac Dimming, flicker free	
Fire Rated	Yes	
Protection Class	Class I	
Degree of protection(IP)	IP44 -front, IP20-whole lamp	
Material	Housing	Aluminum
	Diffuser	PC
Housing Color	White/Black	
L70	>54000Hrs	
Operation Temp.(°C)	20~ 45°C	
Installation	Recessed Mount	
Certificates	CE, Rohs, SAA & C-tick	
Warranty	3 Years	

Packing information

Model Number	Weight/Luminaire (kg)	QTY/BOX (pcs)	Inner Box Size (mm)	Weight/Box (kg)	QTY/CTN (pcs)	Carton Size (cm)	Weight/CTN (kg)	QTY/20GP (PCS)	QTY/40GP (PCS)	QTY/40HQ (PCS)
AU60-DL0508-4C	0.23	1	100*100*85	0.28	48	41*31.5*36	13	29184	58752	67104

Installation Instructions

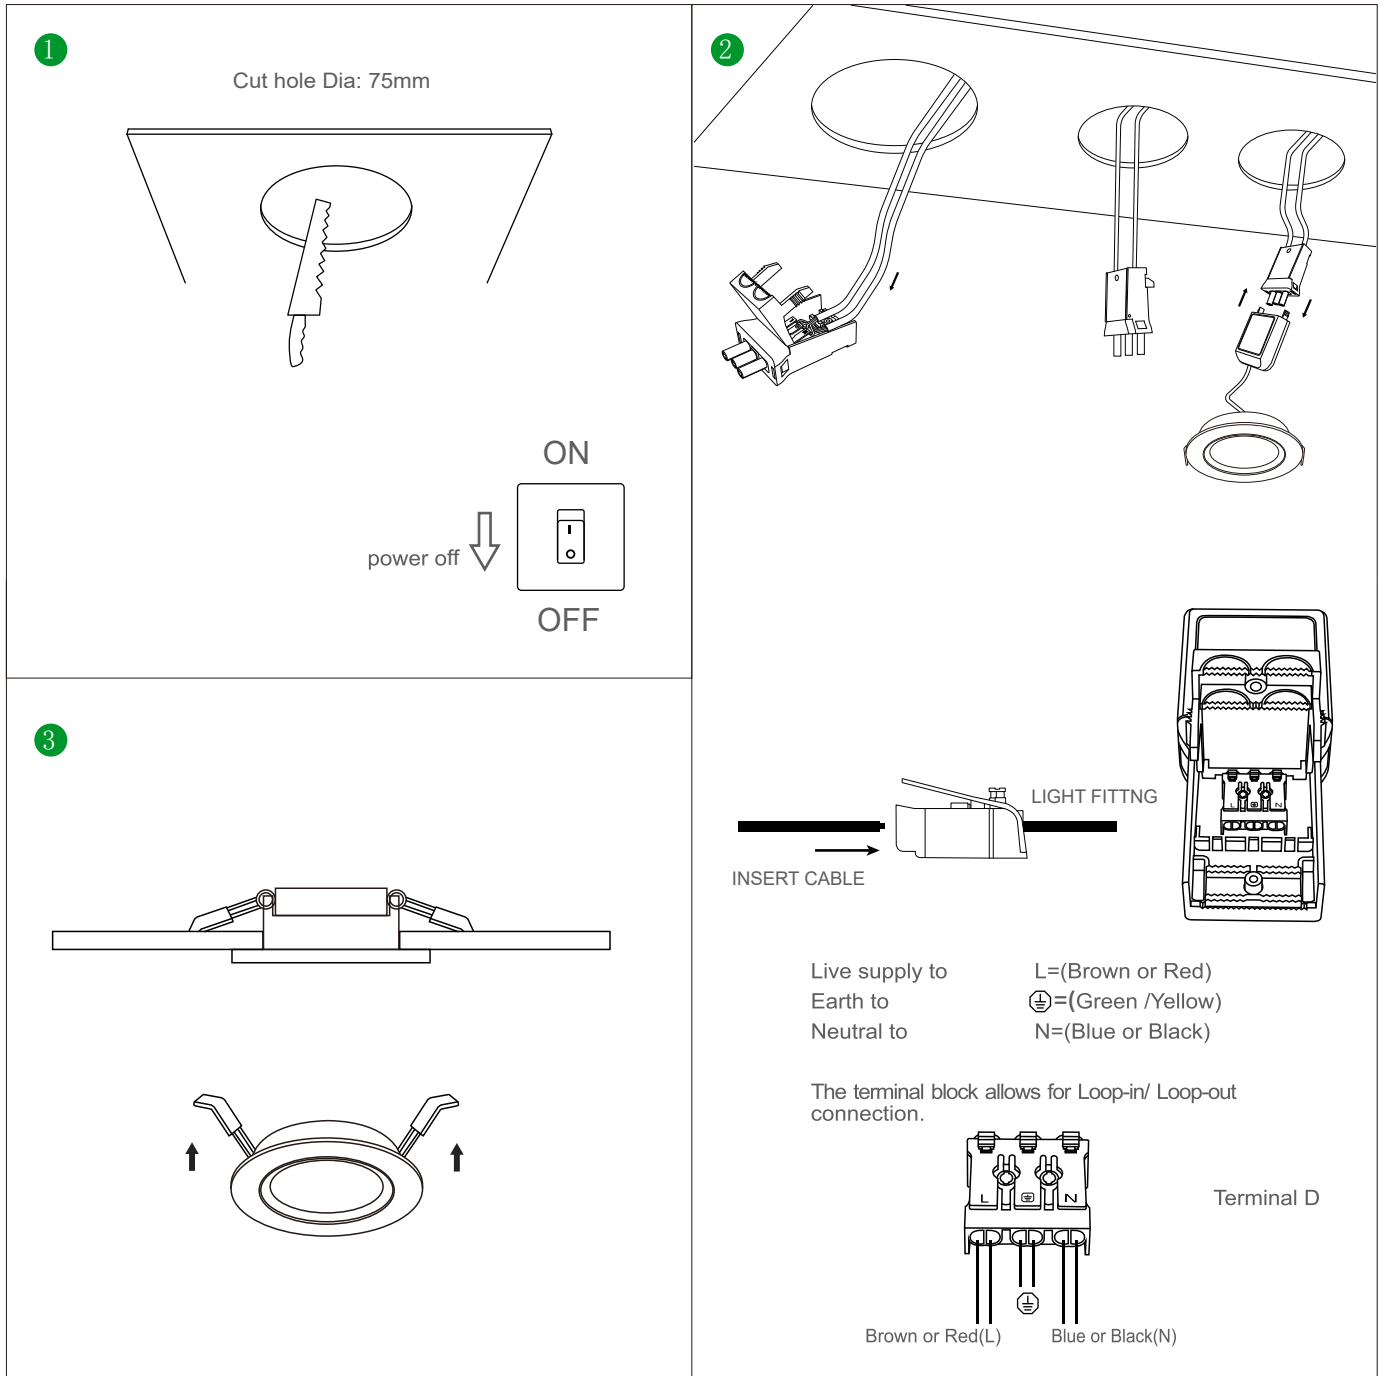

Please Note :

- * Turn off and isolate the electrical supply before connecting this fitting to the building wires.
- * Must be installed, or connected by licenced electrician.
- * The Luminaires are intended for indoor use only.

Applications:

- Hospitality applications
- Residential applications
- Office Buildings
- Hotels
- Shopping Malls
- Supermarkets