







A-UNIQUE

ASIA UNIQUE LED LIGHTING CO., LTD

LED Module 2 Power + 4-CCT

AU337 Series

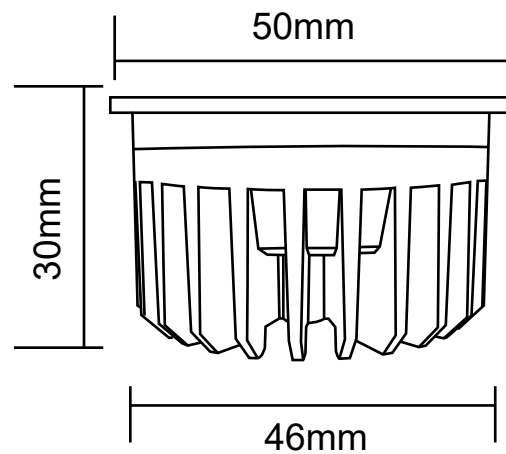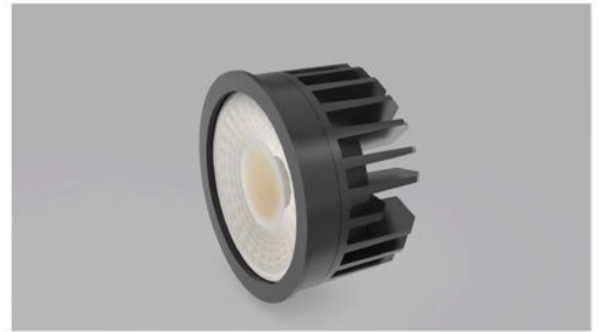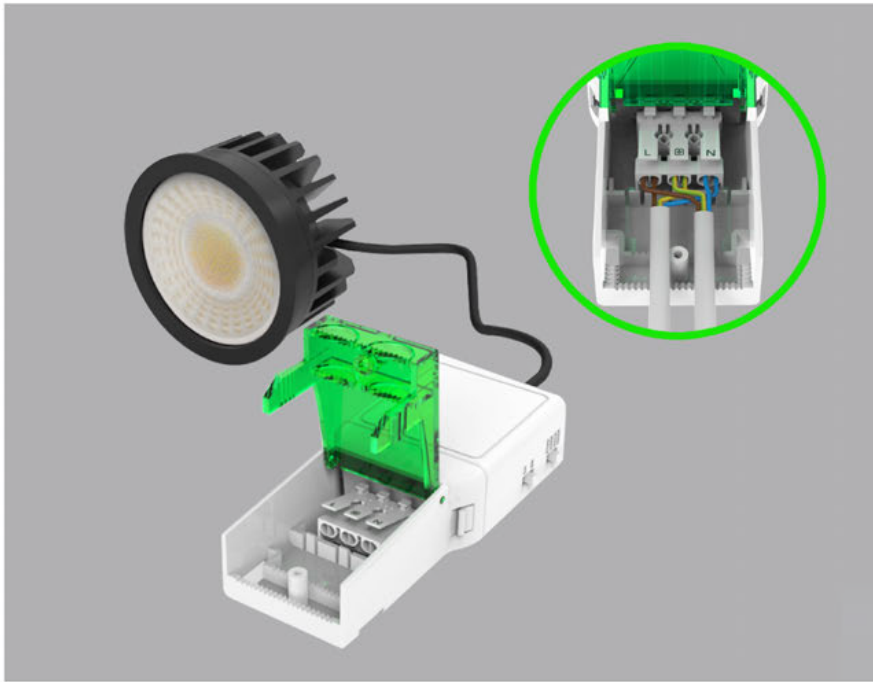

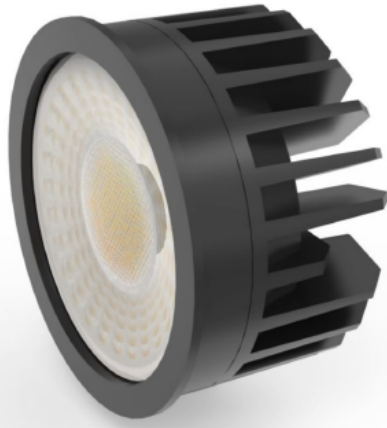

General Features:

- Dual power 4W / 6W switchable
- 4CCT: 2700K 3000K 4000K 6000K selectable via switch
- Flicker Free Driver: For better visual comfort
- Detachable LED Driver, Compatible with Wieland GST18i3 connector
- Triac dimming, compatible with most brand dimmers
- Slim design for shallow ceiling voids
- UKCA, CE , RoHS, SAA & C-tick approved
- Compliance with the latest European ERP regulations
- 3 years warranty


Technical Specifications

Model No.	AU337-DL0406-4C	
Dimension(mm)	Ø 50*30mm	
Cutout(mm)	/	
Wattage(w)	4W/6W switchable	
Input Voltage(v)	AC200~240V	
Light Source	SMD2835	
SDCM	<6	
4 CCT(K)	2700K- 3000K-4000K-6000K Switchable	
Luminous Flux (lm)±5%	4W (380-440lm) 6W(480-570lm)	
CRI	>80Ra (90Ra available by request)	
Beam Angle(°)	60° / 38°	
Tiltable	/	
Driver option	Triac Dimming, flicker free, Detachable, Compatible with Wieland GST18i3 connector	
Fire Rated	/	
Protection Class	Class I	
Degree of protection(IP)	IP40	
Material	Housing	Aluminum
	Diffuser	PC
Housing Color	White / Black	
L70	>54000Hrs	
Operation Temp.(°C)	-20~ 45°C	
Installation	Recessed Mount	
Certificates	UKCA, CE, Rohs, SAA & C-tick	
Warranty	3 Years	

Packing information

Model Number	Weight/Luminaire (kg)	QTY/BOX (pcs)	Inner Box Size (mm)	Weight/Box (kg)	QTY/CTN (pcs)	Carton Size (cm)	Weight/CTN (kg)	QTY/20GP (PCS)	QTY/40GP (PCS)	QTY/40HQ (PCS)
AU337-DL0406-4C	0.23	1	85*85*57	0.28	48	41*31.5*36	14.50	29184	58752	67104

Installation Instructions

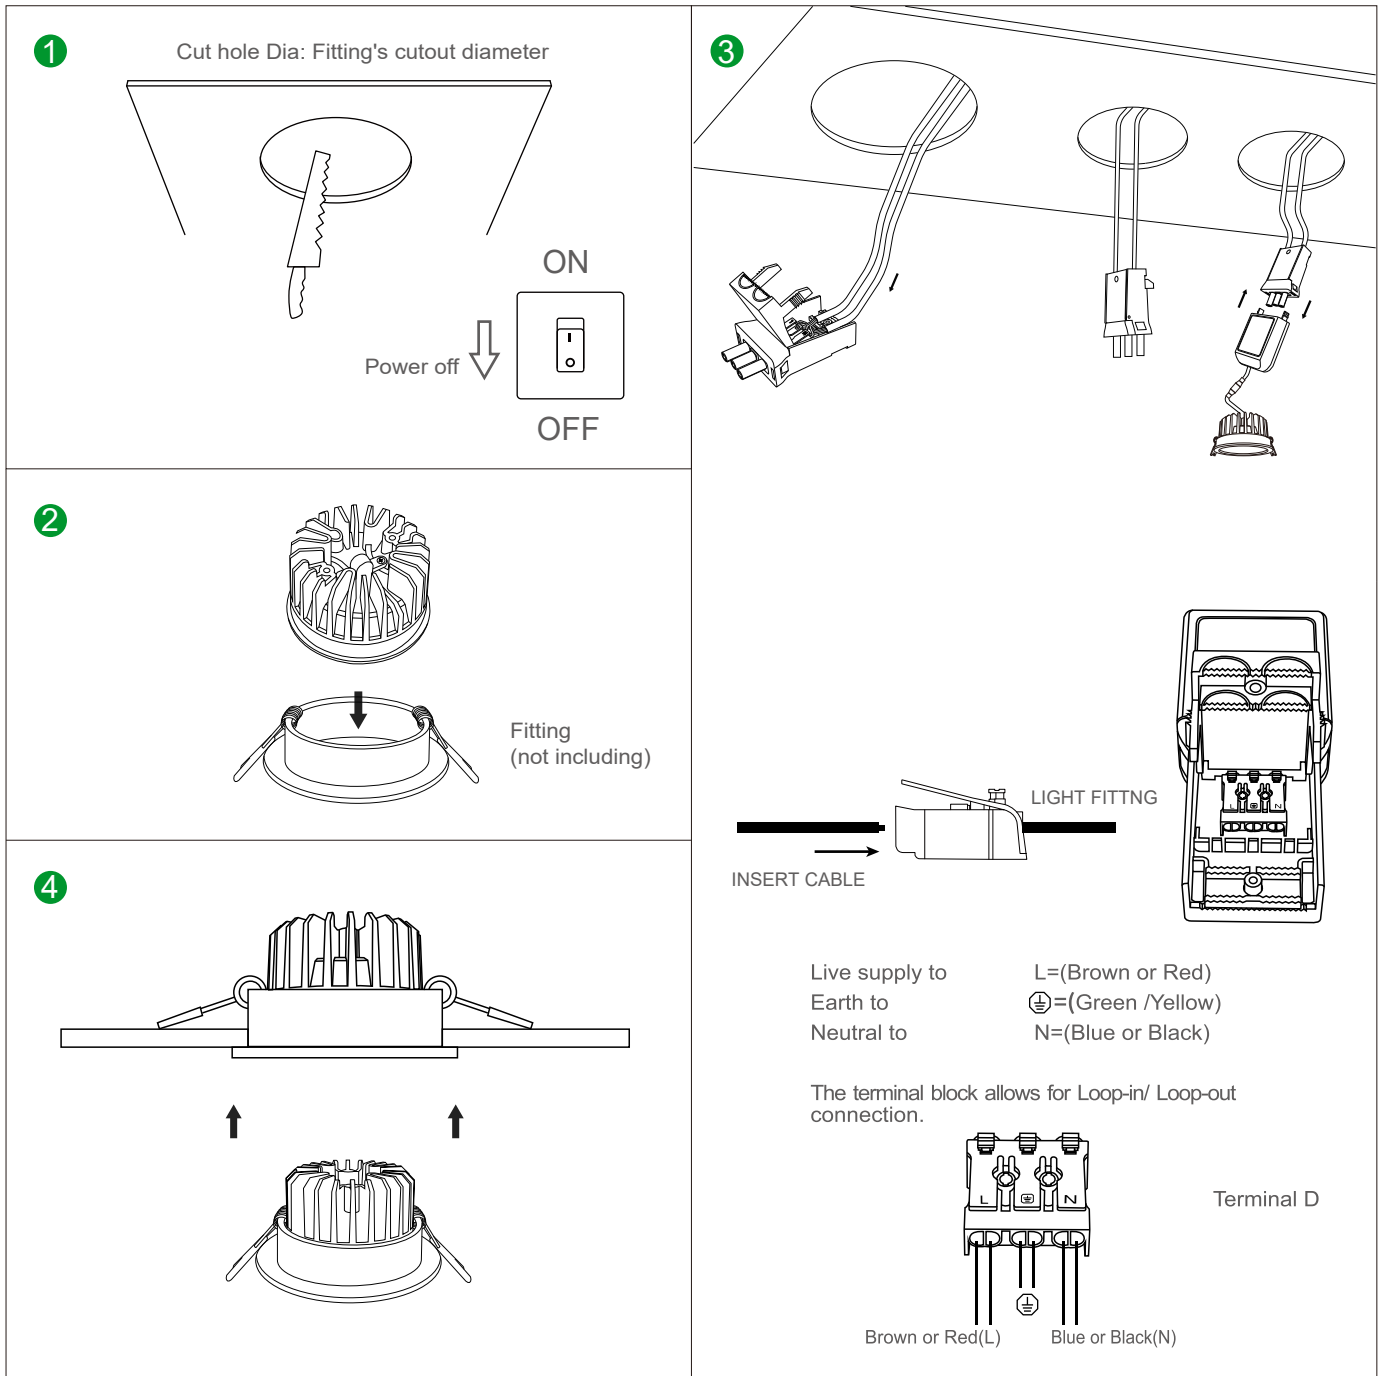

Please Note :

- * Turn off and isolate the electrical supply before connecting this fitting to the building wires.
- * Must be installed, or connected by licenced electrician.
- * The Luminaires are intended for indoor use only.

Applications :

- Hospitality applications
- Residential applications
- Office Buildings
- Hotels
- Shopping Malls
- Supermarkets