




A-UNIQUE

ASIA UNIQUE LED LIGHTING CO., LTD

LED GU10 2 Power + 3-CCT

AU337 Series

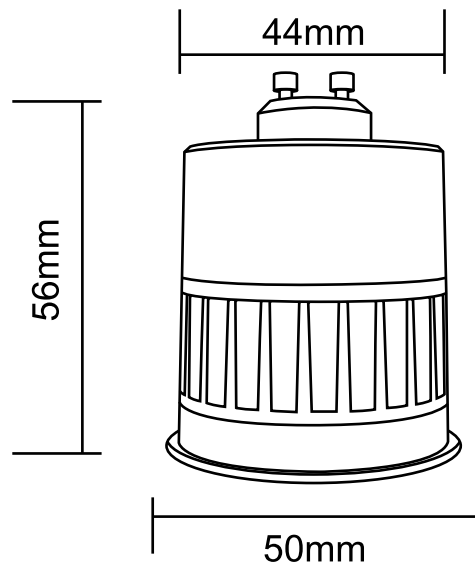



General Features:

- Dual wattage control: 4W/6W selectable
- 3CCT: 3000K 4000K 6000K selectable via switch
- Flicker Free Driver: For better visual comfort
- Triac Dimmable, Compatible to most branded dimmers, and C-bus2 system
- IP40 Rated
- CE, Rohs, UKCA approved
- 3 years warranty


Technical Specifications

Model No.	AU337-GU0406-3C	
Dimension(mm)	Ø 50*56mm	
Cutout(mm)	/	
Wattage(w)	4W/6W switchable	
Input Voltage(v)	AC200~240V	
Light Source	SMD2835	
SDCM	<6	
4 CCT(K)	3000-4000-6000K switchable	
Luminous Flux (lm)±5%	4W (400-480lm) 6W(600-720lm)	
CRI	>80Ra (90Ra available by request)	
Beam Angle(°)	38 / 60°	
Tilttable	/	
Driver option	Triac Dimming, flicker free	
Fire Rated	/	
Protection Class	/	
Degree of protection(IP)	IP40	
Material	Housing	Aluminum
	Diffuser	PC
Housing Color	White / Black	
L70	>54000Hrs	
Operation Temp.(°C)	-20~ 45°C	
Installation	Recessed Mount	
Certificates	CE, Rohs, SAA & C-tick	
Warranty	3 Years	

Packing information

Model Number	Weight/Luminaire (kg)	QTY/BOX (pcs)	Inner Box Size (mm)	Weight/Box (kg)	QTY/CTN (pcs)	Carton Size (cm)	Weight/CTN (kg)	QTY/20GP (PCS)	QTY/40GP (PCS)	QTY/40HQ (PCS)
AU337-GU0406-3C	0.23	1	100*100*85	0.28	48	41*31.5*36	14.50	29184	58752	67104

Installation Instructions

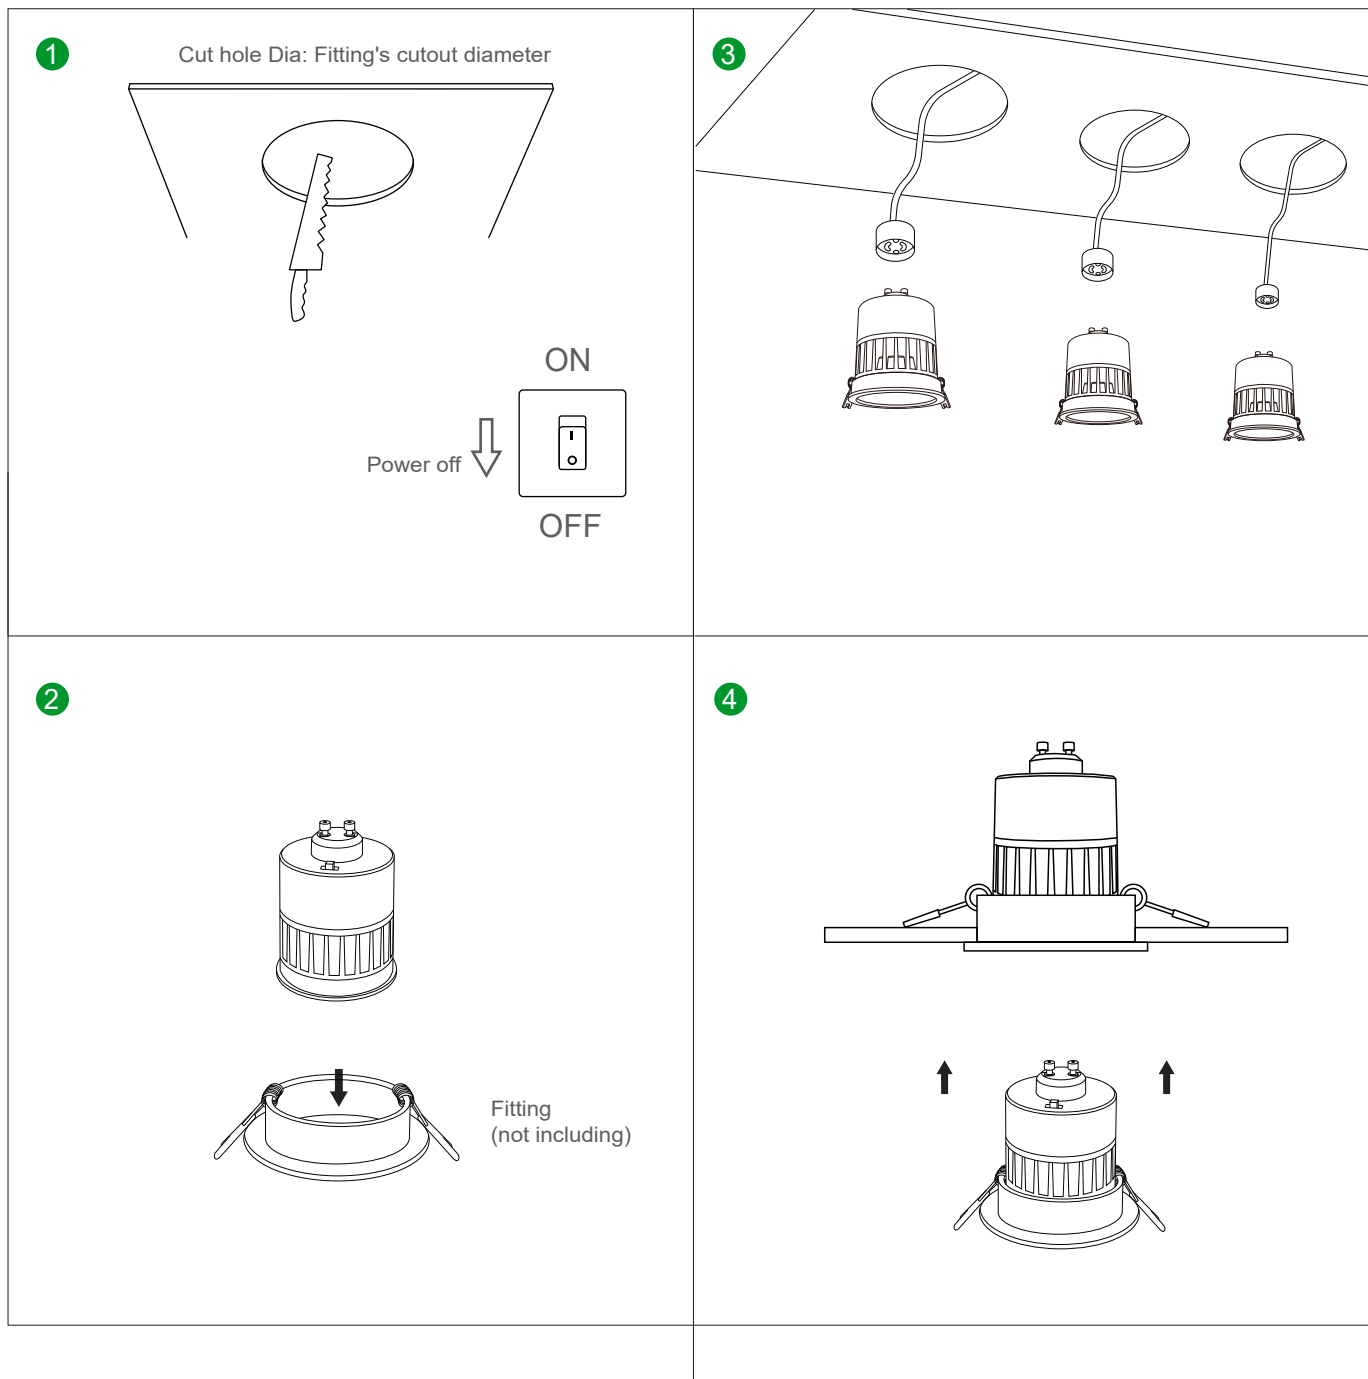

Please Note :

- * Turn off and isolate the electrical supply before connecting this fitting to the building wires.
- * Must be installed, or connected by licenced electrician.
- * The Luminaires are intended for indoor use only.

Applications :

- Hospitality applications
- Residential applications
- Office Buildings
- Hotels
- Shopping Malls
- Supermarkets