





A-UNIQUE

ASIA UNIQUE LED LIGHTING CO., LTD

LED Downlight Select 3 Power + 3 CCT

AU66-DL Series

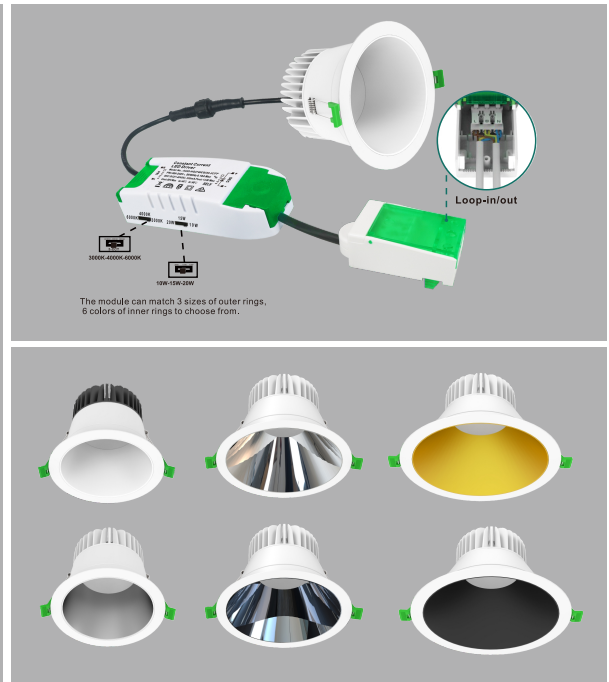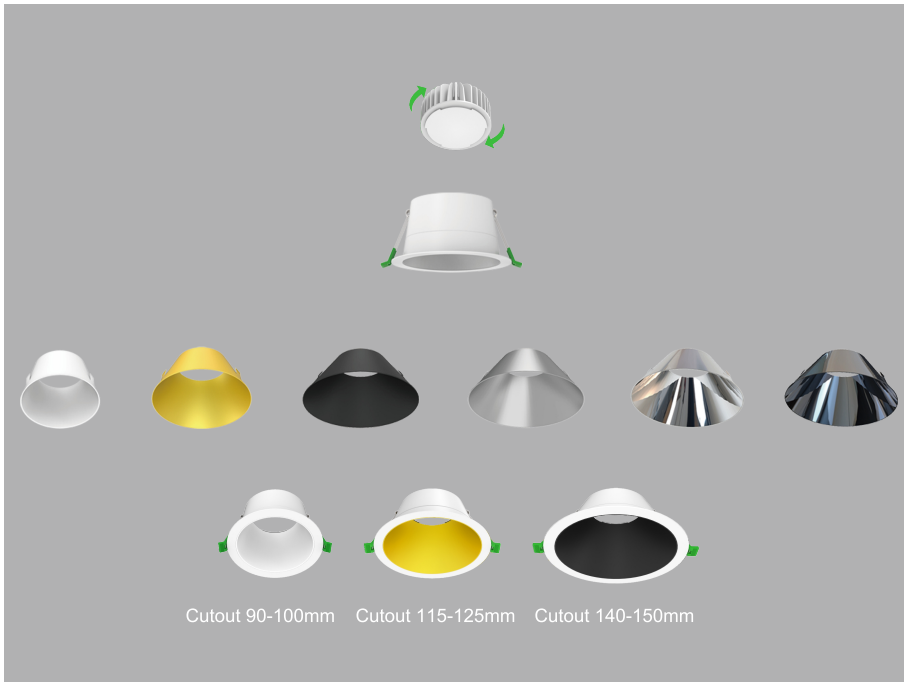


LED Module








out-ring



inside reflectors




Product display

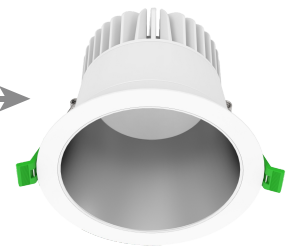

General Features:

- 3Power: The required brightness 10W-15W-20W can be easily select, DIP switches can be adjusted on the driver.
- 3CCT: The desired colour temperatures 3000 K- 4000K-6000K can be selected from the light driver.
- A-unique Driver,our own developed driver is rare and competitive
- Non-Dimmable
- Flicker Free Driver: For better visual comfort
- Three open diameter outer rings are optional & Two color options
- Interchangeable inside reflectors are available in black/white Silver polished / Gold Polished /gun black/silver plating. Other colors as required
- IP44 Rated
- UKCA, CE , RoHS approved, Complies with new ERP regulation
- 3 years warranty

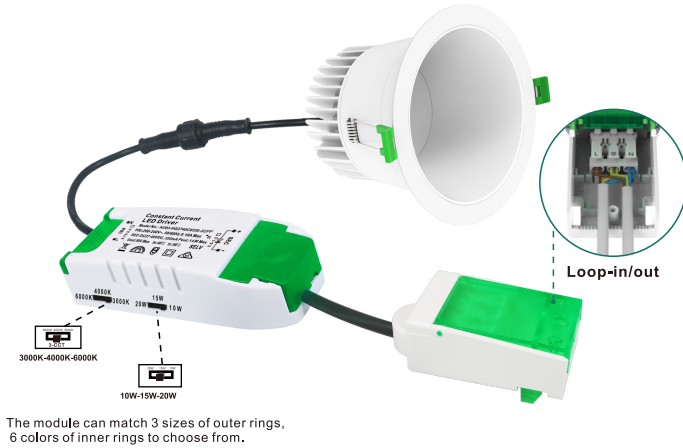


Technical Specifications

Model No.	AU66-DL0720-3C		
Dimension(mm)	Ø 110*H90mm	Ø 135*H90mm	Ø 160*H90mm
Cutout(mm)	90-100	115-125	140-150
wattage(W)	10W-15W-20W selectable		
Input Voltage(v)	AC200~240V		
Light Source	SMD2835		
SDCM	<6		
3 CCT(K)	3000K-4000K-6000K Switchable		
Luminous Flux (lm)±5%	7W@840lm/15W@1500lm		
CRI	>80Ra		
Beam Angle(°)	90°	100°	120°
Tilttable	/		
Driver option	A-unique Driver, Non-Dimmable, Flicke Free		
Fire Rated	/		
Protection Class	Class I		
Degree of protection(IP)	IP44		
Material	Housing	aluminum	
	Diffuser	PC	
Color	Outer Rings	black/white	
	inside reflectors	black/white /Silver polished / Gold Polished /gun black/silver plating.0ther colors as required	
	Radiator	Black/white	
L70	>54000Hrs		
Operation Temp. °C	-20~ 45°C		
Installation	Recessed Mount		
Certificates	UKCA,CE, Rohs, SAA & C-tick		
Warranty	3 Years		

Packing information

Model Number	Weight/Luminaire (kg)	QTY/BOX (pcs)	Inner Box Siz (mm)	Weight/Box (kg)	QTY/CTN (pcs)	Carton Siz	Weight/CTN (kg)	QTY/20GP (PCS)	QTY/40GP (PCS)	QTY/40HQ (PCS)
AU66-DL0720-3C	0.23	1	100*100*85	0.28	48	41*31.5*36	14.50	29184	58752	67104

Installation Instructions

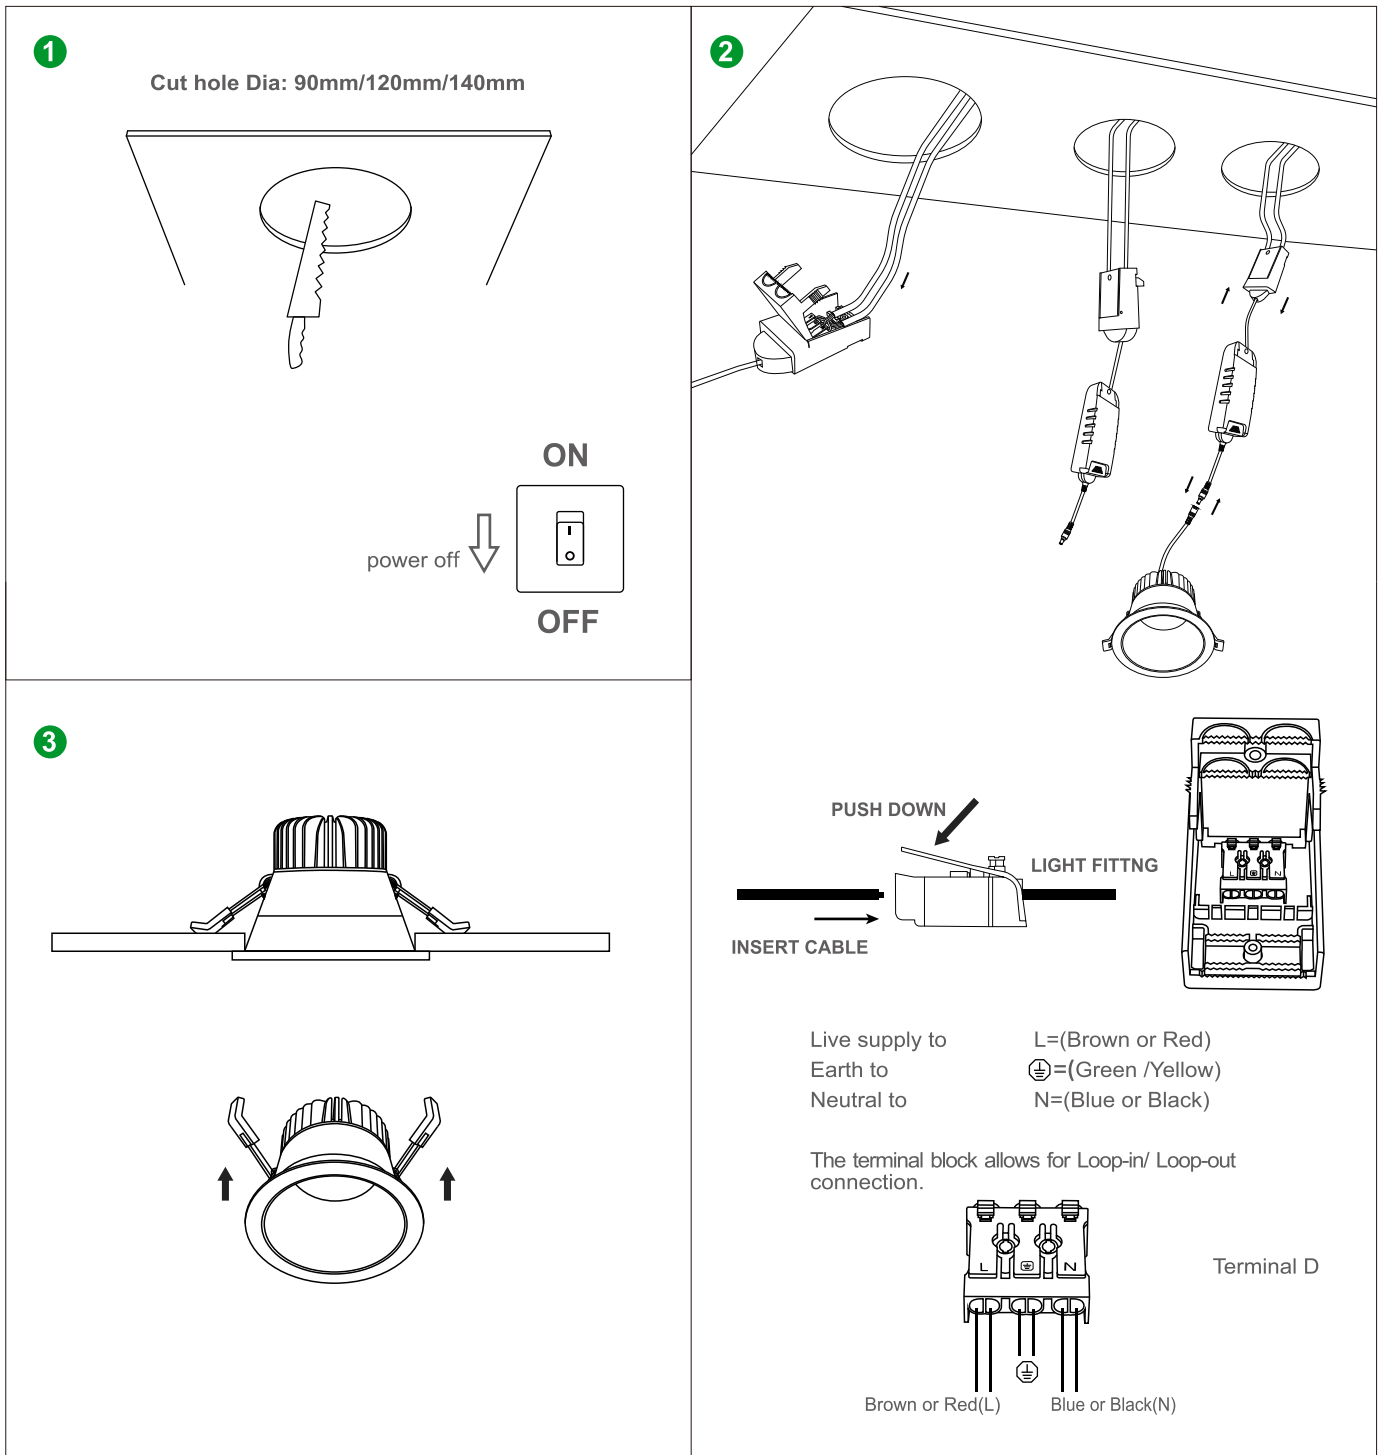

Please Note :

- * Turn off and isolate the electrical supply before connecting this fitting to the building wires.
- * Must be installed, or connected by licenced electrician.
- * The Luminaires are intended for indoor use only.

Applications:

- Hospitality applications
- Residential applications
- Office Buildings
- Hotels
- Shopping Malls
- Supermarkets