





A-UNIQUE

# ASIA UNIQUE LED LIGHTING CO., LTD

## LED Module 2 Power + 4-CCT

## AU03 Series

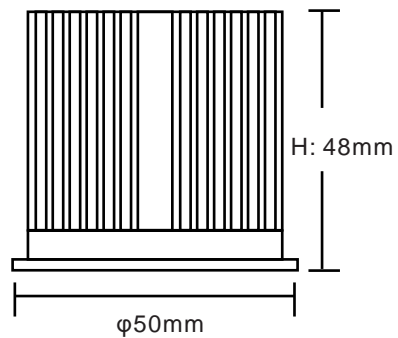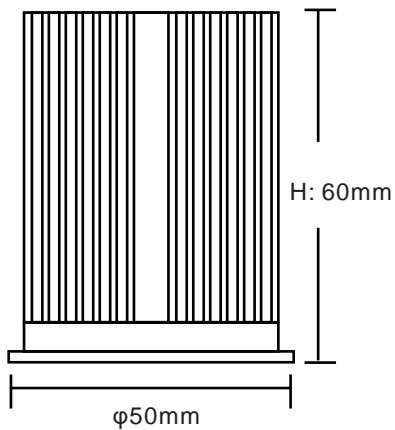

## General Features:



- 4 CCT: 2700K 3000K 4000K 6000K selectable via switch
- Flicker Free Driver: For better visual comfort
- Triac Dimmable, Compatible to most branded dimmers, and C-bus2 system
- IP44 Rated
- CE, Rohs, UKCA approved
- 3 years warranty


## Technical Specifications

Model No.	AU03-DL0508-4C	AU03-DL0508-4C
Dimension(mm)	Ø 50*H48	Ø 50*H60
Cutout(mm)	/	/
Wattage(w)	5W/8W switchable	4W/6W switchable
Input Voltage(v)	AC200~240V	
Light Source	SMD2835	
SDCM	<6	
4 CCT(K)	2700K- 3000K-4000K-6000K Switchable	
Luminous Flux (lm)±5%	5W@550lm/8W@840lm	4W@440lm/6W@660lm
CRI	>80Ra	
Beam Angle(°)	60° / 38°	
Tilttable	/	
Driver option	Yes, Triac Dimming, Flicker Free	
Fire Rated	/	
Protection Class	Class I	
Degree of protection(IP)	IP44	
Material	Housing	Aluminum
	Diffuser	PC
Housing Color	Silver/Black	
L70	>54000Hrs	
Operation Temp.(°C)	-20~ 45°C	
Installation	Recessed Mount	
Certificates	CE, Rohs, SAA & C-tick	
Warranty	3 Years	

## Packing information

Model Number	Weight/Luminaire (kg)	QTY/BOX (pcs)	Inner Box Size (mm)	Weight/Box (kg)	QTY/CTN (pcs)	Carton Size (cm)	Weight/CTN (kg)	QTY/20GP (PCS)	QTY/40GP (PCS)	QTY/40HQ (PCS)
AU03-DL0508-4C	0.23	1	85*85*57	0.28	48	41*31.5*36	14.50	29184	58752	67104
AU03-DL0406-4C	0.23	1	85*85*57	0.28	48	41*31.5*36	14.50	29184	58752	67104

# Installation Instructions

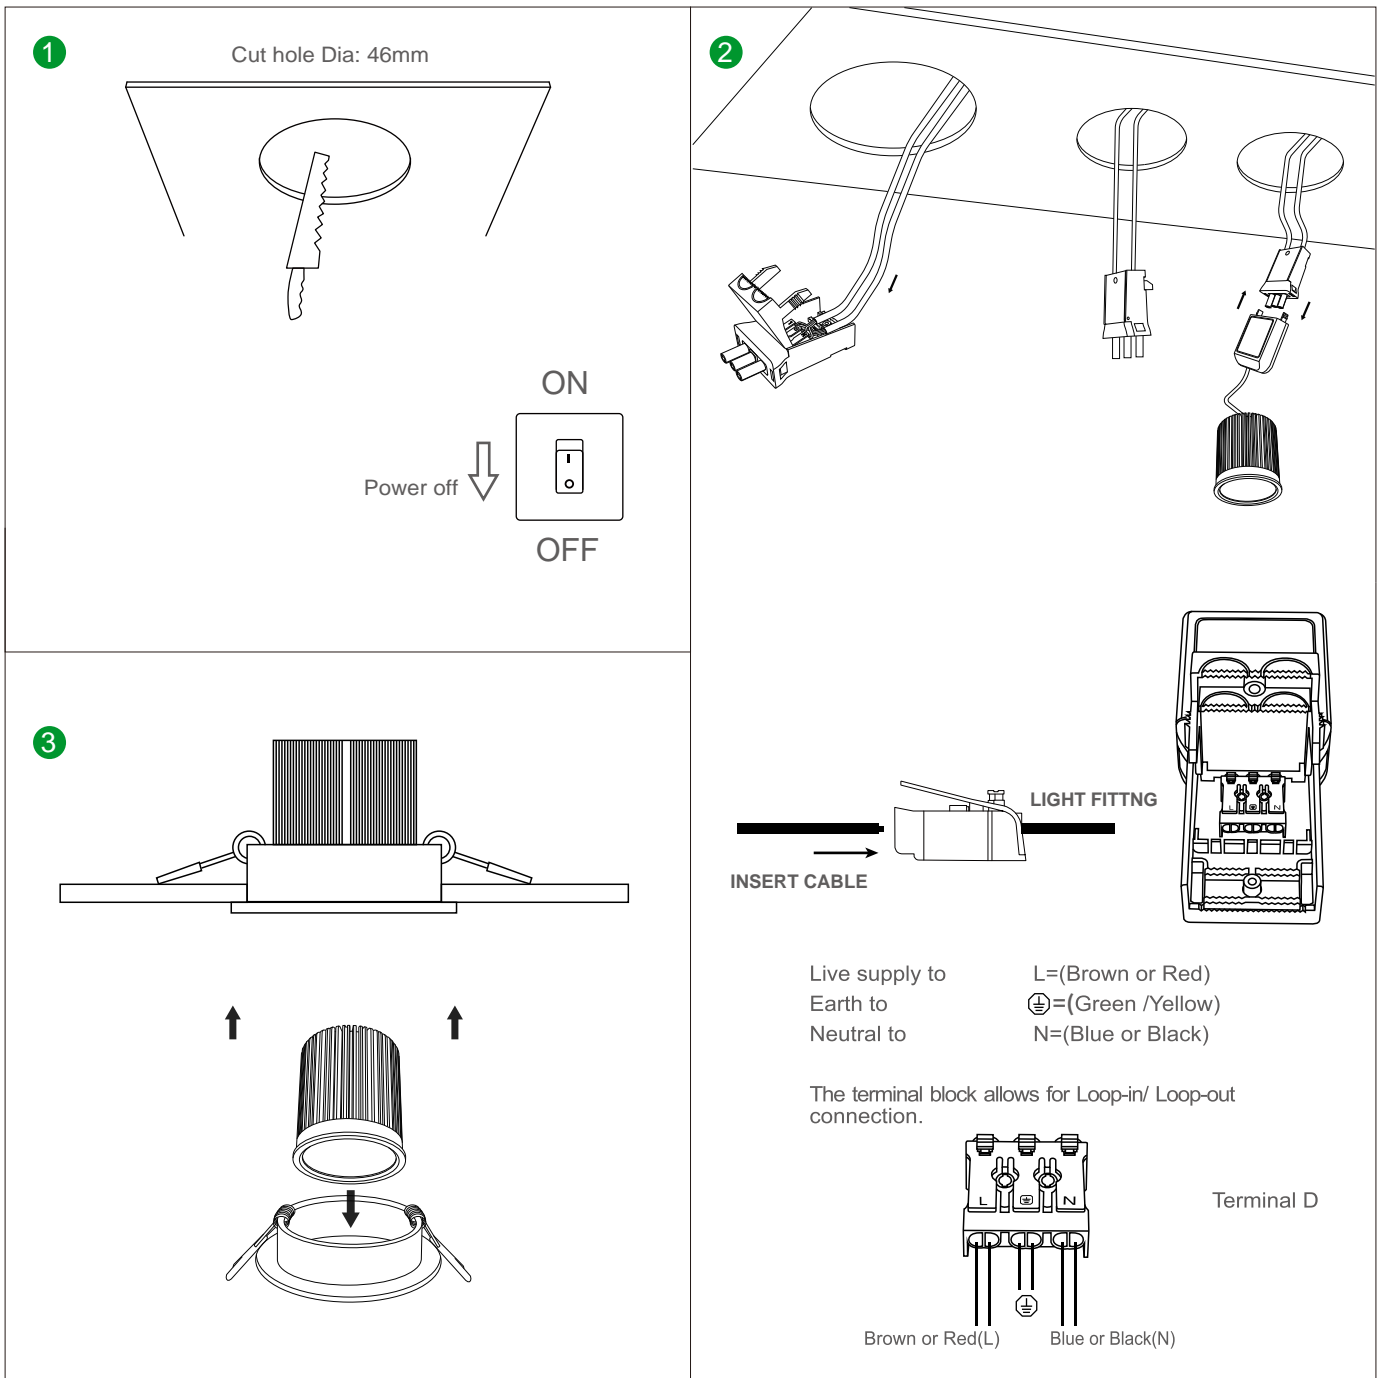

## Please Note :

- \* Turn off and isolate the electrical supply before connecting this fitting to the building wires.
- \* Must be installed, or connected by licenced electrician.
- \* The Luminaires are intended for indoor use only.

## Applications:

- Hospitality applications
- Residential applications
- Office Buildings
- Hotels
- Shopping Malls
- Supermarkets