




A-UNIQUE

ASIA UNIQUE LED LIGHTING CO., LTD


AU23 Low Glare LED Downlight Tuya Smart

AU23-DL Series

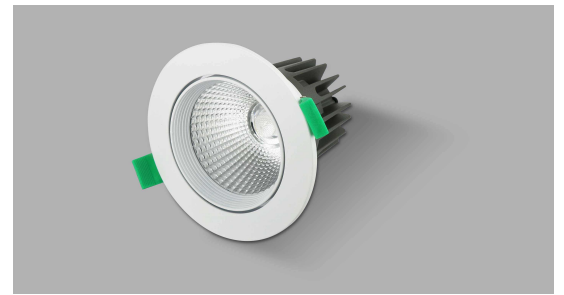

General Features

1. Simplify your life: It has a remote control function, you can directly control **brightness** and **color temperature** through **Tuya APP** on your phone. No monthly fees or Hub needed for this product.
2. Different **scene modes** (Night, Reading, Working, Leisure etc) for you to enjoy the lighting in your life.
3. **Timer** / Countdown Setting: You can set the lamp to turn on or off at any time you required or after a specific time.
4. **Group Control**: You can create a group for all your smart lamps and control them all in one command.
5. You can **share** the lamps with others to control them together.
6. Family management: You can **creat a home**, then add home members and manage them.
7. **Smart voice control**: No hub required, works great with **Alexa**, **Google Home** and **SmartThings** etc Intelligent speakers, you can easily turn on/off the lamp and adjust the CCT with just your voice.

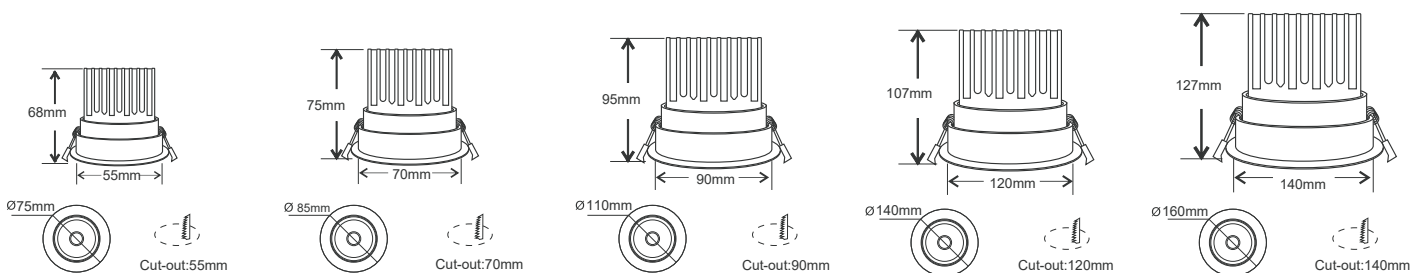



General Features:

- Distinctive design, deep recess and trimless fitting
- Low Glare downlight with superb soft light glow
- Tiltable fitting, can adjust angle
- Flicker free Tuya dimming **Constant Current** led driver,
- 90Ra led chip and 3-CCT are available if required
- IP44 rated for the front, ideal for corridors, bathrooms, dining rooms and bedroom, etc.
- SAA, C-tick, CE and RoHS approved
- 3years warranty

Technical Specifications

Model No.	AU23- DL7W55XX	AU23- DL7W70XX	AU23- DL10W70XX	AU23- DL12W90XX	AU23-DL15W90XX
Dimension(mm)	Ø70*H65	Ø85*H75	Ø85*H75	Ø110*H95	Ø110*H95
Cutout(mm)	55	70	70	90	90
Wattage(w)	7W	7W	10W	12W	15W
Input Voltage(v)	AC220~240V				
Light Source	COB				
SDCM	<6				
CCT(K)	1 CCT	2700K/3000K/4000K/5000K//6000K/6500K			
	3 CCT	2700K-4000K-6500K or 3000K-4000K-6000K			
Luminous Flux (lm)±5%	455-490	455-490	700-750	840-900	1050-1125
CRI	>80Ra or >90Ra optional				
Beam Angle(°)	15°/24°/38°/60°				
Dimming option	Yes, Tuya Dimming, Flicker Free				
Fire Rated	Not Available				
Protection Class	Class III				
Degree of protection(IP)	IP20				
Material	Trim	Aluminum			
	Heat-sink	Aluminum			
	Diffuser	PMMA			
Trim Color	white/black/silver/satin chrome				
L70	>54000Hrs				
Operation Temp.(°C)	-20~ 45°C				
Installation	recessed				
Certificates	CE, RoHS, SAA & C-tick				
Warranty	3 Years				


Packing information

Model Number	Weight/Luminaire (kg)	QTY/BOX (pcs)	Inner Box Size (mm)	Weight/Box (kg)	QTY/CTN (pcs)	Carton Size (cm)	Weight/CTN (kg)	QTY/20GP (PCS)	QTY/40GP (PCS)	QTY/40HQ (PCS)
AU23-DL7W55XX	0.32	1	115*115*105	0.37	36	48*36*33.5	14.0	17712	35424	41328
AU23-DL7W70XX	0.40	1	115*115*120	0.45	36	48*36*38	15.6	16416	32832	38016
AU23-DL10W70XX	0.40	1	115*115*120	0.45	36	48*36*38	15.6	16416	32832	38016
AU23-DL12W90XX	0.50	1	115*115*140	0.55	36	48*36*44	20.5	13824	27648	32832
AU23-DL15W90XX	0.50	1	115*115*140	0.55	36	48*36*44	20.5	13824	27648	32832
AU23-DL18W90XX	0.50	1	115*115*140	0.55	36	48*36*44	20.5	13824	27648	32832
AU23-DL25W120XX	0.85	1	160*160*136	1.55	12	50*34*30	20.6	6528	13080	15504
AU23-DL30W140XX	1.28	1	180*180*160	1.98	12	56*38*34	25.5	6528	13080	15504
AU23-DL40W140XX	1.28	1	180*180*160	1.98	12	56*38*34	25.5	6528	13080	15504


*Above datas are for downlights with flicker free led driver.

Installation Instructions


1. Open a hole according to the cutout size of led downlight.

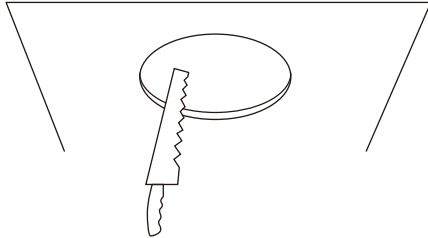


2. Use screw-driver to open the driver terminal cover, feed the main AC wire L. N. in terminal block respectively, then fix the cover back.

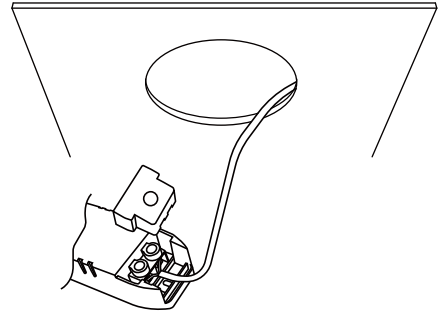

3. Connect the downlight with driver, hold back the spring clip then push the downlight into the hole.

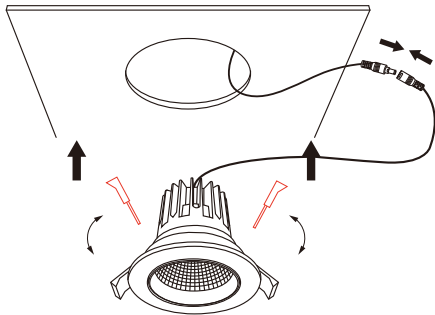

4. Make sure the downlight fixed tightly in ceiling, turn on the power.

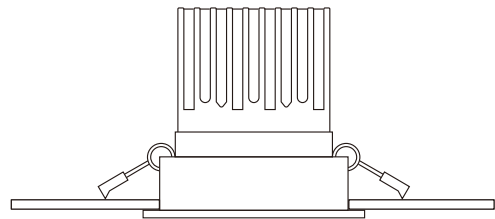

Please Note:

- * Turn off and isolate the electrical supply before connecting this fitting to the building wires.
- * Must be installed, or connected by licenced electrician.
- * The Luminaires are intended for indoor use only.

Applications:

- Hospitality applications
- Residential applications
- Office Buildings
- Hotels
- Shopping Malls
- Supermarkets